



Termocoppia con guaina in ceramica e testa "M"

Thermocouple with ceramic sheath and "M" head

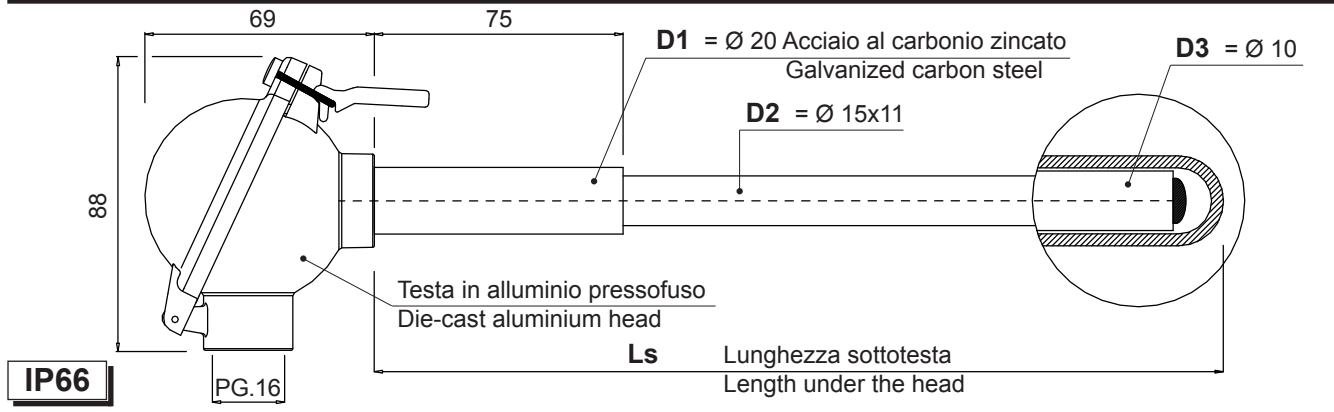

Lunghezza Ls	Length
02	100 mm
03	150 mm
04	200 mm
05	250 mm
06	300 mm
07	350 mm
08	400 mm
09	450 mm
10	500 mm
11	550 mm
12	600 mm
13	650 mm
14	700 mm
15	750 mm
16	800 mm
17	850 mm
18	900 mm
19	950 mm
20	1000 mm
21	1050 mm
22	1100 mm
23	1150 mm
24	1200 mm
25	1250 mm
26	1300 mm
27	1350 mm
28	1400 mm
29	1450 mm
30	1500 mm
31	1550 mm
32	1600 mm
33	1650 mm
34	1700 mm
35	1750 mm
36	1800 mm
37	1850 mm
38	1900 mm
39	1950 mm
40	2000 mm
41	2050 mm
42	2100 mm
43	2150 mm
44	2200 mm
45	2250 mm
46	2300 mm
47	2350 mm
48	2400 mm
49	2450 mm
50	2500 mm

! Tutte le quote sono espresse in mm
All dimensions are in millimeters

Opzioni canotto (D1) Rod options

Material	Length
C 20	02 100 mm
A	03 150 mm
	04 200 mm
	05 250 mm
	06 300 mm
	07 350 mm
	08 400 mm
	09 450 mm
	10 500 mm
	11 550 mm
	12 600 mm
	13 650 mm
	14 700 mm
	15 750 mm
	16 800 mm
	17 850 mm
	18 900 mm
	19 950 mm
	20 1000 mm

Material options:
A: Acciaio al carbonio zincato (Galvanized carbon steel standard)
I: Acciaio inox aisi 310 (Stainless steel aisi 310)

Massime temperature di lavoro consigliate °C Advised maximum operating temperatures °C

Type	Uso continuo Continuous use		Uso intermittente Intermittent use	
	Ø 2.30	Ø 3.26	Ø 2.30	Ø 3.26
K (NiCr-Ni)	990	1060	1110	1160
N (Nicrosil-Nisil)	1110	1160	1200	1250

Termoelemento Thermoelement

Single (Ø 3.26 mm)	Double (Ø 2.30 mm)
1	2

Tipo termocoppia Thermocouple type

K (NiCr-Ni)	N (Nicrosil-Nisil)
2	3

Guaine di protezione Protecting sheaths

Guaina esterna Outer protection tube (D2)	C 610 (AL203 60%) (EN.60.672-DIN VDE 0335)	C 799 (AL203 99.7%) (EN.60.672-DIN VDE 0335)
Isolatore Insulator (D3)	Ceramica Ceramic	Ceramica Ceramic
	00	10

! Esempio di ordine: Cod. **T1000.021.0012 + CA2003** Termocoppia tipo "K", guaina esterna C610, lunghezza sottotesta 600 mm + opz. canotto in acciaio al carbonio L=150 mm.
Ordering example: Cod. **T1000.021.0012 + CA2003** "K" type thermocouple, outside sheath C610, length under the head 600 mm + opt. galvanized carbon steel rod L=150 mm

T 1 0 . 0 . 0 0

Tolleranze secondo IEC 584.2 CL.2 (+/- 2.5°C oppure +/- 0.75%) (Considerare il maggiore tra i due valori)
Tolerances according to IEC 584.2 CL.2 (+/- 2.5°C or +/- 0.75%) (the highest value applies)
Tolleranze dimensionali +/- 3% - Dimensional tolerances +/- 3%



Focus Impianti Via Monte Grappa, 7/G 36050 Quinto Vicentino (VI)
P. +39 0444 1452952 - F. +39 0444 356489
info@fornifocus.it - www.fornifocus.it