


Termoresistenza PT 100 con cavo ad isolamento minerale (MgO) testa MA (range - 70°C / + 500°C)


PT 100 resistance thermometer with mineral insulated cable (MgO) MA head (operating range - 70°C / + 500°C)

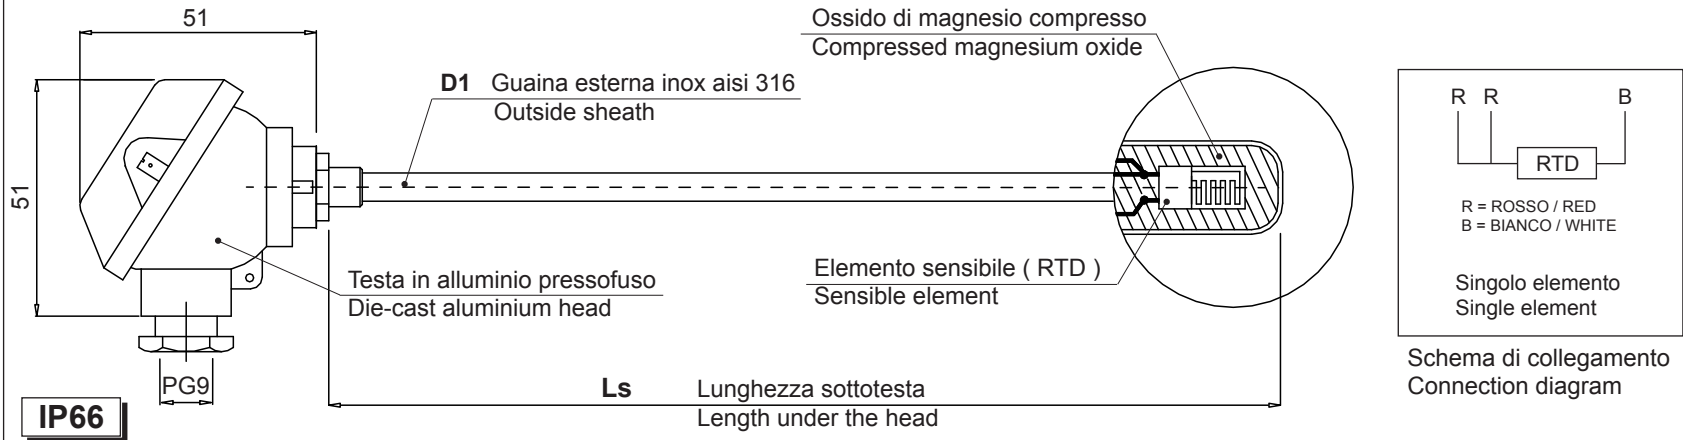

**Lunghezza Ls
Length**

01	70 mm
02	120 mm
03	170 mm
04	220 mm
05	270 mm
06	320 mm
07	370 mm
08	420 mm
09	470 mm
10	520 mm
11	570 mm
12	620 mm
13	670 mm
14	720 mm
15	770 mm
16	820 mm
17	870 mm
18	920 mm
19	970 mm
20	1020 mm
22	1120 mm
24	1220 mm
26	1320 mm
28	1420 mm
30	1520 mm
32	1620 mm
34	1720 mm
36	1820 mm
38	1920 mm
40	2020 mm
42	2120 mm
44	2220 mm
46	2320 mm
48	2420 mm
50	2520 mm
52	2620 mm
54	2720 mm
56	2820 mm
58	2920 mm
60	3020 mm

! Tutte le quote sono espresse in mm
All dimensions are in millimeters

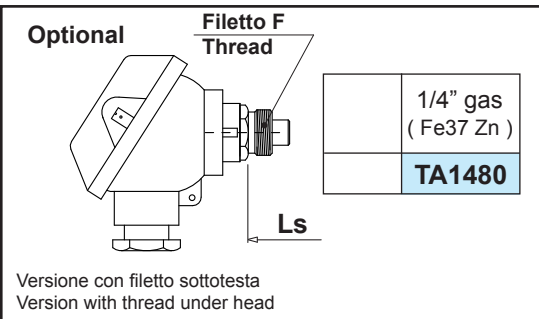

**Diametro guaina esterna D1 (mm)
Outside sheath diameter**

Ø 3	Ø 4.5	Ø 6
30	45	60

**Tolleranza elemento sensibile (IEC751)
Tolerance of sensitive element**

Classe A Class A (+/- 0,15°C a 0°C)	Classe B Class B (+/- 0,30°C a 0°C)
3	0

! Inserimento minimo 40 mm.
Minimum insertion 40 mm.

! Esempio di ordine: Cod. **R1200.071.3008 + TA1480** termoresistenza PT100 in classe "B", singolo termoelemento, guaina esterna Ø 8 mm, lunghezza sottotesta 400 mm + opt. filetto 1/4"gas
Ordering example: Cod. **R1200.071.3008 + TA1480** Class "B" PT100 resistance thermometer, single thermoelement, outside sheath Ø 8 mm, length under the head 400 mm + opt. filetto 1/4"gas



Focus Impianti Via Monte Grappa, 7/G 36050 Quinto Vicentino (VI)
P. +39 0444 1452952 - F. +39 0444 356489
info@fornifocus.it - www.fornifocus.it



Tolleranze dimensionali +/- 3% - Dimensional tolerances +/- 3%